

Product Description




CONTROL PANEL



Single Lifting Point



Breaker

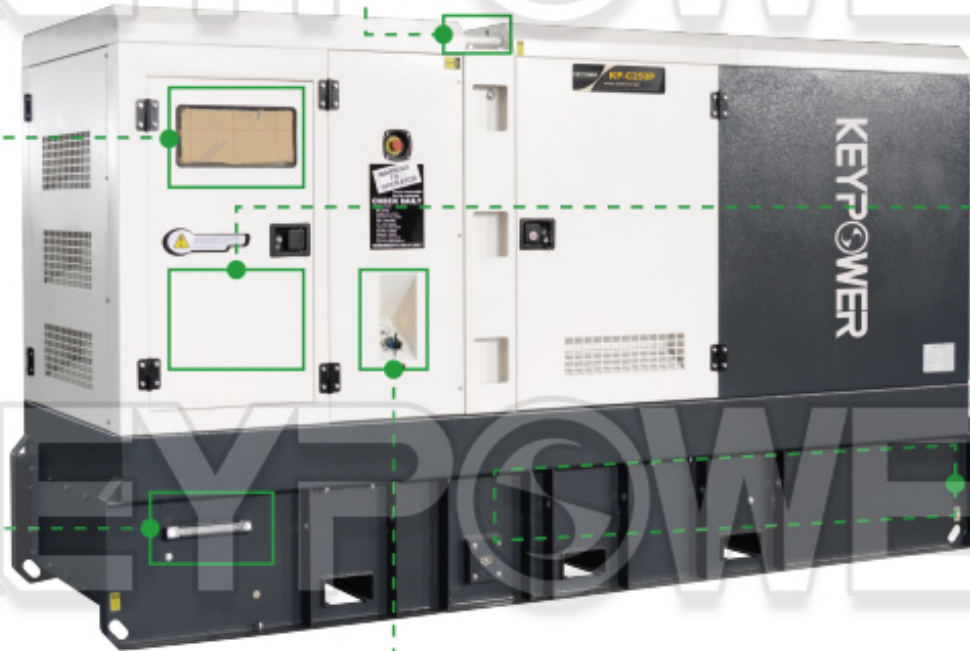

Cable Clamp



External Fuel Filler



**Draggable Fuel Tank
for Easy Cleaning**

KP-C SERIES SPECIFICATIONS



50Hz

415/240V 3Phase 4 Wires 50Hz COS ϕ = 0.8

Parameters of CUMMINS Diesel Engine 1500rpm

Genset Model	Standby Power		Prime Power		Engine Model	Consumption (Full Load) (L/h)
	KVA	KW	KVA	KW		
KP28	27.5	22	25	20	4B3.9-G1	6.14
KP30	30	24	27.5	22	4B3.9-G2	6.7
KP45	45	36	40	32	4BT3.9-G1	9.3
KP45	45	36	40	32	4BT3.9-G2	9.3
KP55	55	44	50	40	4BTA3.9-G2	11.6
KP62	62	50	56	45	4BTA3.9-G2	13.1
KP65	65	52	60	48	4BTA3.9-G2	13.6
KP70	70	56	65	52	4BTA3.9-G2	14.1
KP85	85	68	75	60	4BTA3.9-G11	15.1
KP93	93	74	85	68	6BT5.9-G1	18.7
KP100	100	80	94	75	6BT5.9-G2	22
KP110	110	88	100	80	6BT5.9-G2	24
KP125	125	100	115	92	6BTA5.9-G2	27
KP145	145	116	135	108	6BTA5.9-G2	30
KP170	170	136	155	124	6BTA5.9-G12	33
KP200	200	160	180	144	6CTA8.3-G1	40
KP200	200	160	180	144	6CTA8.3-G2	40
KP215	215	172	200	160	6CTAA8.3-G2	45
KP250	250	200	225	180	6LTA8.9-G2	47.7
KP275	275	220	250	200	6LTA8.9-G3	53
KP275	275	220	250	200	NT855-GA	53.4
KP313	313	250	275	220	NTA855-G1A	61.3
KP-313	313	250	275	220	6LTA9.5-G3	58
KP350	350	280	325	260	6LTA9.5-G1	70
KP350	350	280	313	250	NTA855-G1B	68
KP375	375	300	345	275	NTA855-G2A	73.9



Genset Model	Standby Power		Prime Power		Engine Model	Consumption (Full Load) (L/h)
	KVA	KW	KVA	KW		

KP390	390	310	350	280	NTA855-G4	76
KP400	400	320	375	300	NTAA855-G7	85.4
KP412	412	330	375	300	KTA19-G2	86
KP438	437.5	350	400	320	QSNT-G3	88
KP450	450	360	—	—	NTAA855-G7A	89.2
KP500	500	400	450	360	KTA19-G3	97
KP550	550	440	500	400	KTA19-G3A	107
KP550	550	440	500	400	KTA19-G4	107
KP600	600	480	525	420	KTAA19-G5	113
KP650	650	520	N.A.	N.A.	KTA19-G8	128
KP650	650	520	575	460	KTAA19-G6	128
KP650	650	520	600	480	KTAA19-G6A	129
KP687	687	550	—	—	KTAA19-G6A	135
KP700	700	560	650	520	QSKTAA19-G4	143
KP700	700	560	625	500	KT38-G	145
KP787	787	630	715	570	KTA38-G1	155
KP800	800	640	725	580	KT38-GA	160
KP825	825	660	750	600	KTA38-G2	167
KP880	880	704	800	640	KTA38-G2B	170
KP1000	1000	800	910	728	KTA38-G2A	190
KP1025	1025	820	940	752	KTA38-G5	200
KP1100	1100	880	1000	800	KTA38-G5	209
KP1250	1250	1000	—	—	KTA38-G9	256
KP1375	1375	1100	1250	1000	KTA50-G3	274
KP1600	1600	1280	1375	1100	KTA50-G8	289
KP1600	1600	1280	1475	1180	KTA50-GS8	309

